

**Refrigeration Equipment  
Merchandiser Freezer, 23 cu.  
ft, 1 Glass Door, black (R290)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738250 (KCHGM26F)

1-glass door merchandiser freezer, black, 23 cubic feet, R290 refrigerant gas, -9°F

**Short Form Specification**

Item No. \_\_\_\_\_

1-glass door freezer with exterior back and bottom panel in galvanized steel, exterior side and top in painted steel; interior back, side top and bottom panels in 304 stainless steel.

Control with cabinet temperature display. Self-closing door.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

**Main Features**

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Interior LED light to save energy and for best internal visibility.

**Construction**


- Lockable door.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**Optional Accessories**


- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_

**Front**

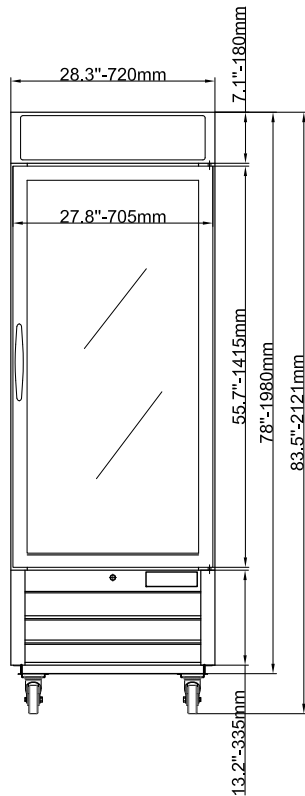

**Side**

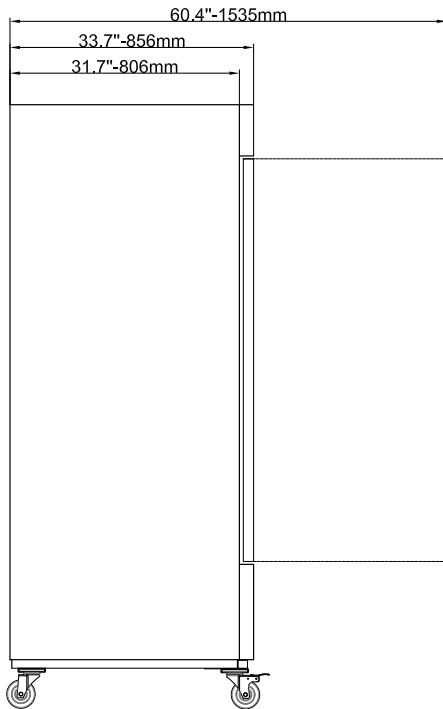

**EI** = Electrical connection  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

## Electric

<b>Supply voltage:</b>	738250 (KCHGM26F)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		0.8 kW
<b>Current consumption:</b>		8 Amps
<b>Plug type:</b>		USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	23 cu.feet
------------------------	------------

## Key Information:

<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	28 5/16" (720 mm)
<b>External dimensions, Depth:</b>	33 7/8" (856 mm)
<b>External dimensions, Height:</b>	80 1/2" (2121 mm)
<b>Number and type of doors:</b>	1 Glass
<b>Internal Dimensions (depth):</b>	62 1/64"
<b>Internal Dimensions (height):</b>	28 3/8"
<b>Internal Dimensions (width):</b>	25 3/16"
<b>Shipping height:</b>	83 1/16" (2180 mm)
<b>Shipping weight:</b>	353 lbs (160 kg)
<b>Shipping volume:</b>	52.72 ft <sup>3</sup> (1.49 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	4 - Vinyl-Coated Steel
<b>Type of external material:</b>	Black Prepainted Steel
<b>Type of internal material:</b>	White Prepainted Aluminium
<b>Warranty:</b>	3 / 5 years

## Refrigeration Data

<b>Compressor Horsepower:</b>	3/4
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	110 g
<b>Operating temperature min.:</b>	-7.6 °F
<b>Operating temperature max.:</b>	-4 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost