

**Refrigeration Equipment  
Sandwich/Salad Preparation Table,  
72" with 18GN 1/6 containers -  
Stainless Steel (R290)**


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

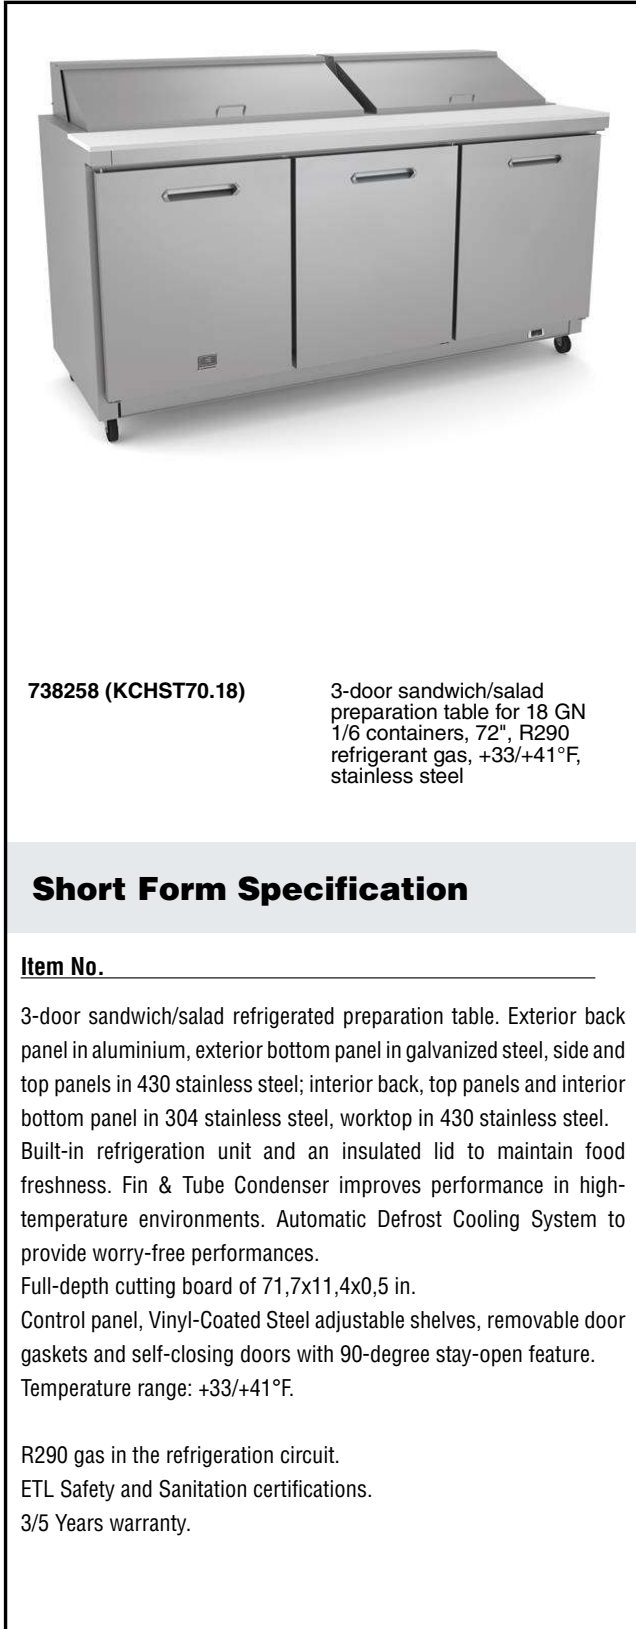

**738258 (KCHST70.18)**

3-door sandwich/salad preparation table for 18 GN 1/6 containers, 72", R290 refrigerant gas, +33/+41°F, stainless steel

**Short Form Specification**

**Item No.** \_\_\_\_\_

3-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 71,7x11,4x0,5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.  
ETL Safety and Sanitation certifications.  
3/5 Years warranty.

**Main Features**


- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

**Construction**

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 18 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**APPROVAL:** \_\_\_\_\_

**Refrigeration Equipment  
Sandwich/Salad Preparation Table, 72" with 18GN 1/6  
containers - Stainless Steel (R290)**

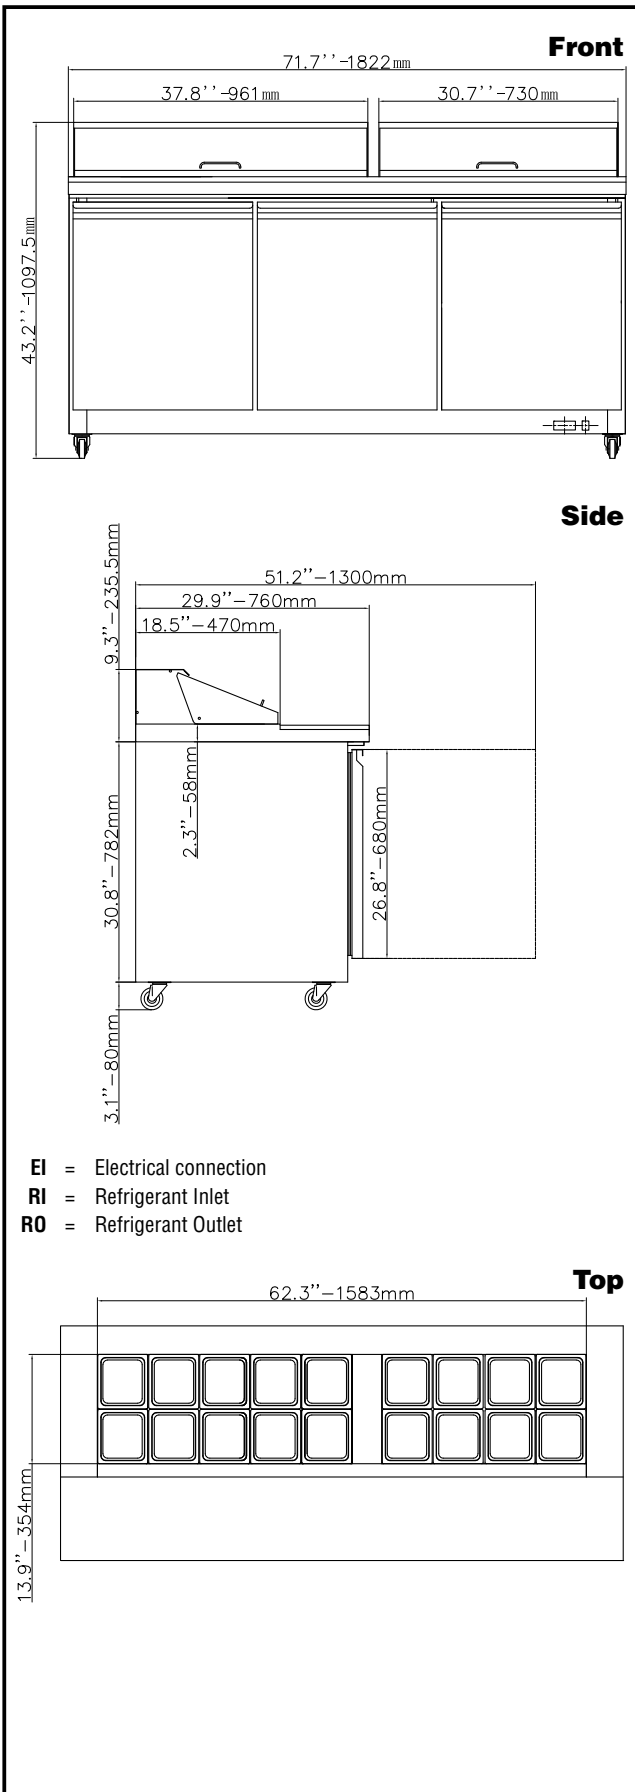

### Electric

|                               |                  |
|-------------------------------|------------------|
| <b>Supply voltage:</b>        | 115 V/1 ph/60 Hz |
| <b>738258 (KCHST70.18)</b>    |                  |
| <b>Electrical power, max:</b> | 0.7 kW           |
| <b>Plug type:</b>             | NEMA 5-15        |

### Capacity:

|                        |            |
|------------------------|------------|
| <b>Gross capacity:</b> | 18 cu.feet |
|------------------------|------------|

### Key Information:

|   |  |
|---|--|
| <b>Door hinges:</b>                         | 1 Left+2 Right                               |
| <b>External dimensions, Width:</b>          | 71 11/16" (1822 mm)                          |
| <b>External dimensions, Depth:</b>          | 29 15/16" (760 mm)                           |
| <b>External dimensions, Height:</b>         | 43 1/4" (1097.5 mm)                          |
| <b>Number and type of doors:</b>            | 3 Full                                       |
| <b>Internal Dimensions (depth):</b>         | 23 13/16"                                    |
| <b>Internal Dimensions (height):</b>        | 23 1/2"                                      |
| <b>Internal Dimensions (width):</b>         | 66 7/16"                                     |
| <b>Shipping height:</b>                     | 47 1/4" (1200 mm)                            |
| <b>Shipping weight:</b>                     | 419 lbs (190 kg)                             |
| <b>Shipping volume:</b>                     | 63.12 ft <sup>3</sup> (1.79 m <sup>3</sup> ) |
| <b>Number and type of grids (included):</b> | 3 - 538x425/580x425                          |
| <b>Type of external material:</b>           | Stainless Steel                              |
| <b>Type of internal material:</b>           | Polystyrene                                  |
| <b>Warranty:</b>                            | 3 / 5 years                                  |

### Refrigeration Data

|                                    |              |
|------------------------------------|--------------|
| <b>Compressor power:</b>           | R290         |
| <b>Refrigerant type:</b>           | R290         |
| <b>Operating temperature min.:</b> | 32 °F        |
| <b>Operating temperature max.:</b> | 41 °F        |
| <b>Condenser type:</b>             | Fin & tube   |
| <b>Defrost type:</b>               | Auto Defrost |