

**Refrigeration Equipment  
Undercounter Freezer, 6 cu.ft, 27  
" with 1 Door- Stainless Steel  
(R290)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**738265 (KCHUC27F)**

1-door undercounter freezer,  
27", R290 refrigerant gas, -9°  
F, stainless steel

**Short Form Specification**

**Item No.** \_\_\_\_\_

1-door freezer counter top with exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel.

Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

**Main Features**

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.


**Construction**

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**Optional Accessories**

- shelf for 27" undercounter PNC 880599
- 
- shelf clips PNC 880611
- 
- drawers kit for 27" undercounter PNC 880614
- 

**APPROVAL:** \_\_\_\_\_

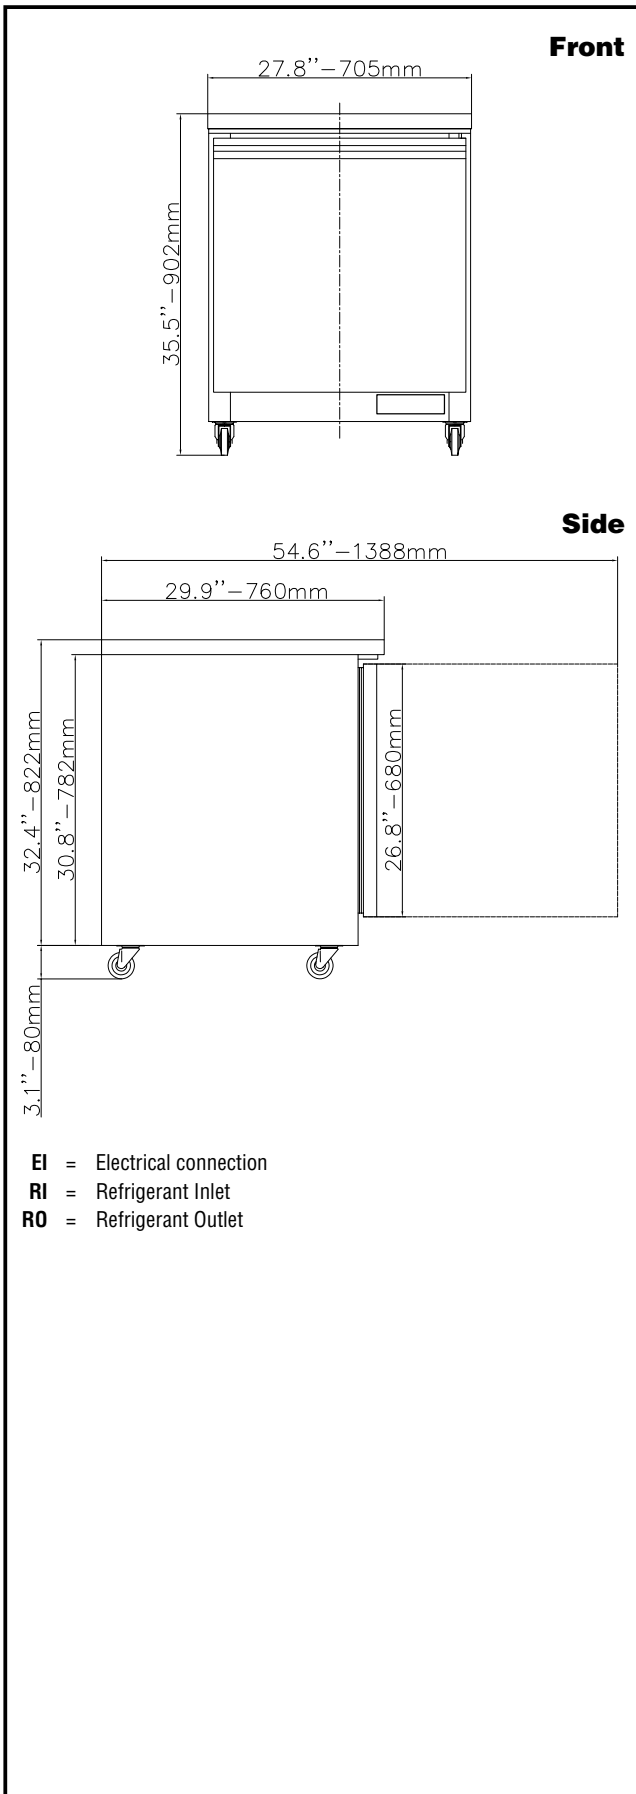

## Electric

<b>Supply voltage:</b>	
738265 (KCHUC27F)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.2 kW
<b>Current consumption:</b>	1.9 Amps
<b>Plug type:</b>	USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	6.5 cu.feet
------------------------	-------------

## Key Information:

<b>Door hinges:</b>	Right Side
<b>Capacity:</b>	6.50004 cu.ft.
<b>External dimensions, Width:</b>	27 13/16" (705 mm)
<b>External dimensions, Depth:</b>	29 15/16" (760 mm)
<b>External dimensions, Height:</b>	35 1/2" (902 mm)
<b>Number and type of doors:</b>	1 Full
<b>Internal Dimensions (depth):</b>	22 13/16"
<b>Internal Dimensions (height):</b>	23 1/2"
<b>Internal Dimensions (width):</b>	22 1/4"
<b>Shipping height:</b>	38 3/16" (970 mm)
<b>Shipping weight:</b>	194 lbs (88 kg)
<b>Shipping volume:</b>	20.41 ft <sup>3</sup> (0.58 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	1 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years

## Refrigeration Data

<b>Compressor Horsepower:</b>	1/5
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	110 g
<b>Operating temperature min.:</b>	-9.4 °F
<b>Operating temperature max.:</b>	8.6 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost