

PROJECT:	
MODEL #:	
ITEM #:	QTY:
AVAILABLE W/H:	APPROVAL:

## Glass Door Back Bar Coolers



BBB59-2BG-HC



BBB69-3BG-HC



BBB23-1BG-HC



BBB90-4BG-HC

## STANDARD FEATURES

### Cabinet construction

- Stainless steel top with black vinyl coated steel walled exterior. Interior is galvanized steel with stainless steel floor.
- High density foamed in place polyurethane insulation – Environmentally safe.
- Two (2) adjustable shelves per section
- Interior height allows stacking of three "tall boy" beers

### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

- Front breathing, side mounted compressor unit. Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
- Epoxy coated evaporator reduces potential corrosion
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Refrigerators have a temperature range between 33°F ~ 39°F
- Automatic defrosting

### Doors

- Double pane glass doors
- Durable gasket with easy replacement.

- Stand door locks

### Lighting

- Interior LED lighting

### Standard

- NSF/ANSI Standard 7 compliant

### Connection

- 9 ft long flexible three wire cord with molded plug


### Optional Features & Accessories

- 6" legs available
- 4" caster standard on BBB23-1BG-HC Model


# Glass Door Back Bar Coolers

## PRODUCT PLAN VIEW


- Top View -

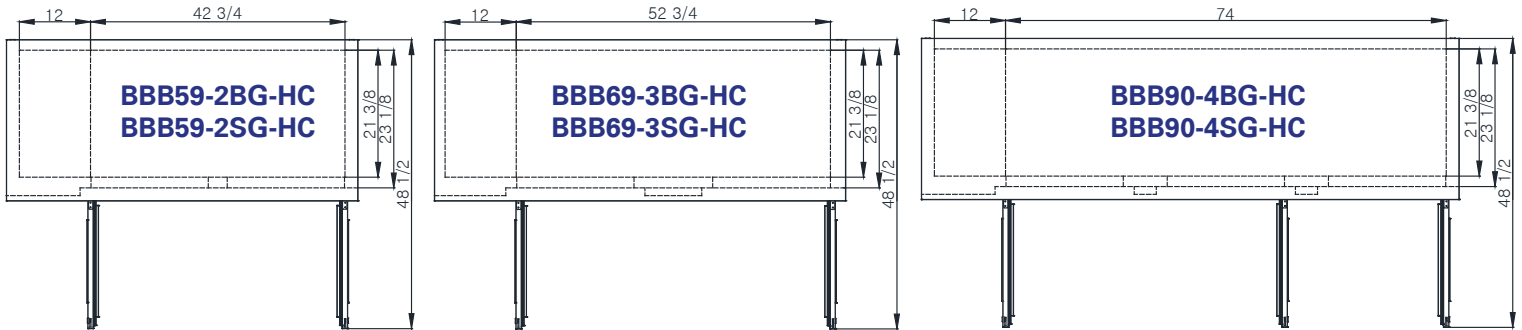


- Front View -

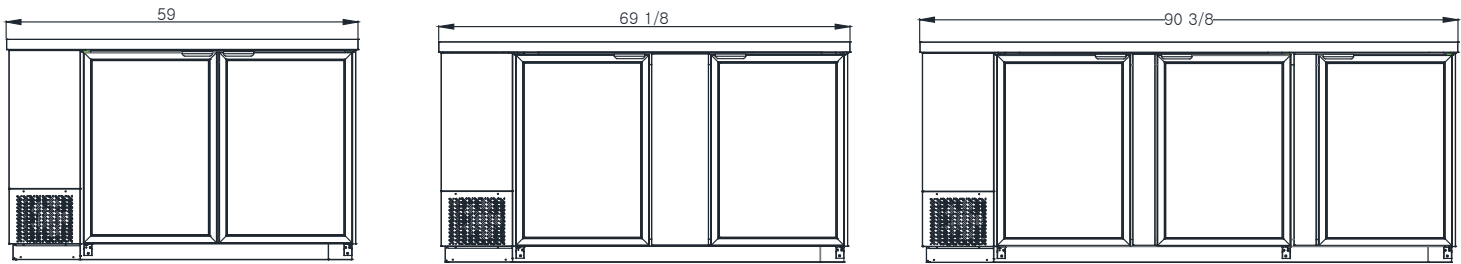


- Side View -




- Top View -

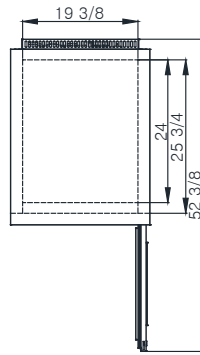

- Front View -



- Side View -



**BBB23-1BG-HC**  
**BBB23-1SG-HC**

## PRODUCT SPECIFICATION

### Glass Door Back Bar Coolers

Model	Product Description			Refrigerant	Temperature Range			Easy Maintenance			Cord Length (ft/m)	
	Glass Door Back Bar Coolers			R-290	33°F ~ 39°F			Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu.Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA config.	Weight (lbs / kg)	
L				D	H	Net Weight					Ship Weight	
BBB23-1BG(SG)-HC	1	7.9	2	23 3/8" (595mm)	31 1/8" (792mm)	39 1/8" (995mm)	1/4	115V / 60Hz	3.0	NEMA 5-15	132 (60)	139 (63)
BBB59-2BG(SG)-HC	2	19.4	4	59" (1500mm)	27 1/8" (688mm)	37" (940mm)	3/8	115V / 60Hz	3.5	NEMA 5-15	236 (107)	256 (116)
BBB69-3BG(SG)-HC	2	23.4	4	69 1/8" (1755mm)	27 1/8" (688mm)	37" (940mm)	3/8	115V / 60Hz	3.5	NEMA 5-15	262 (119)	287 (130)
BBB90-4BG(SG)-HC	3	31.6	6	90 3/8" (2295mm)	27 1/8" (688mm)	37" (940mm)	3/8	115V / 60Hz	3.5	NEMA 5-15	331 (150)	364 (165)

\*BLUE AIR has the right to change specifications without further notice.