



COMMERCIAL

Refrigeration Equipment 3-Door Full Height Freezer 81 " Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738246 (KCHRI81R3DF)

3-Door Full Height Freezer 81
" Long

Short Form Specification

Item No. _____

3 full doors freezer with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel.

Control with cabinet temperature display. Self-closing and on-site reversible door feature lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- shelf for 54" and 81" (left/right) reach-in PNC 880591
- middle shelf for 81" reach-ins PNC 880592
- shelf clips PNC 880611
- SHEET PAN RACK FITS KCHRI MODELS PNC 880622


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

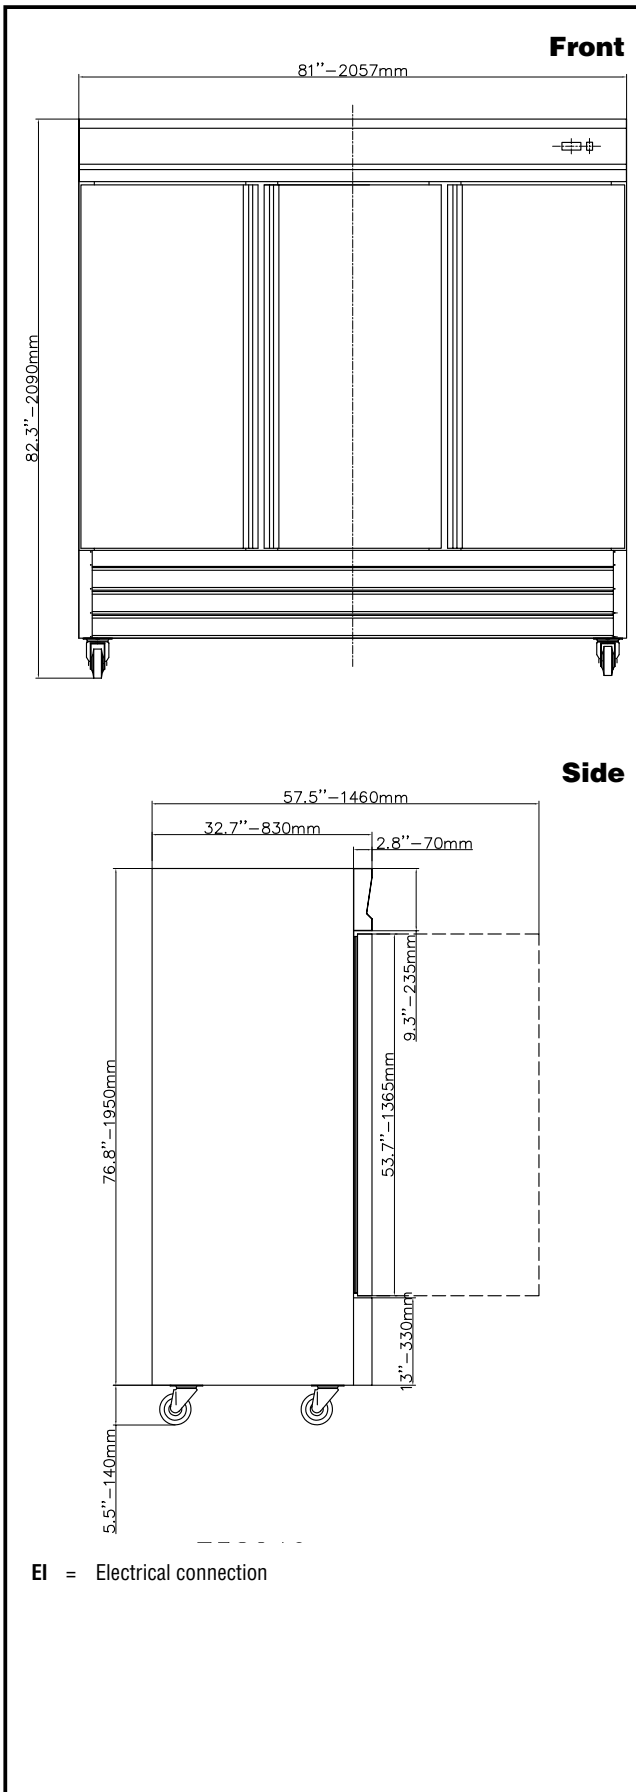

Electric

Supply voltage:	115 V/1 ph/60 Hz
738246 (KCHRI81R3DF)	
Electrical power, max:	1 kW
Plug type:	USA NEMA L14-20P

Key Information:

Capacity (Cu.Ft.)	72
Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	76 5/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	809 lbs (367 kg)
Shipping volume:	139.55 ft ³ (3.95 m ³)
Number and type of grids (included):	9 - Coated Steel
Compressor Horsepower:	1 1/4
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

Refrigeration Data

Operating temperature min.:	-7.6 °F
Operating temperature max.:	-4 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Current consumption:	9 Amps
Refrigerant type:	R290
Refrigerant weight:	150 g