



COMMERCIAL

Refrigeration Equipment 1-Door Pizza Prep Table 48 " Long 6-1/3 Pan


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

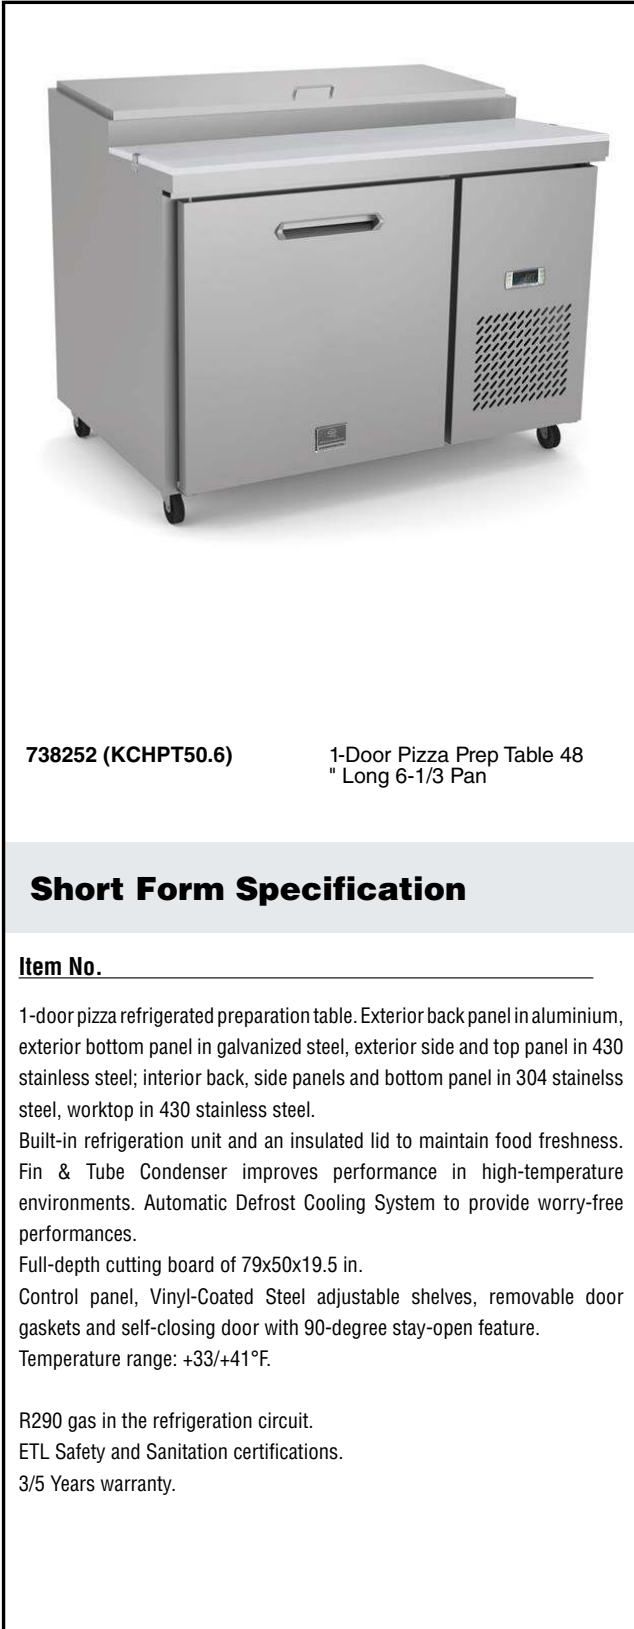

738252 (KCHPT50.6)

1-Door Pizza Prep Table 48
" Long 6-1/3 Pan

Short Form Specification

Item No. _____

1-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x50x19.5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing door with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Holds 6 1/3 pans.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- shelf for 50 pizza counter PNC 880601
- shelf clips PNC 880611

APPROVAL: _____

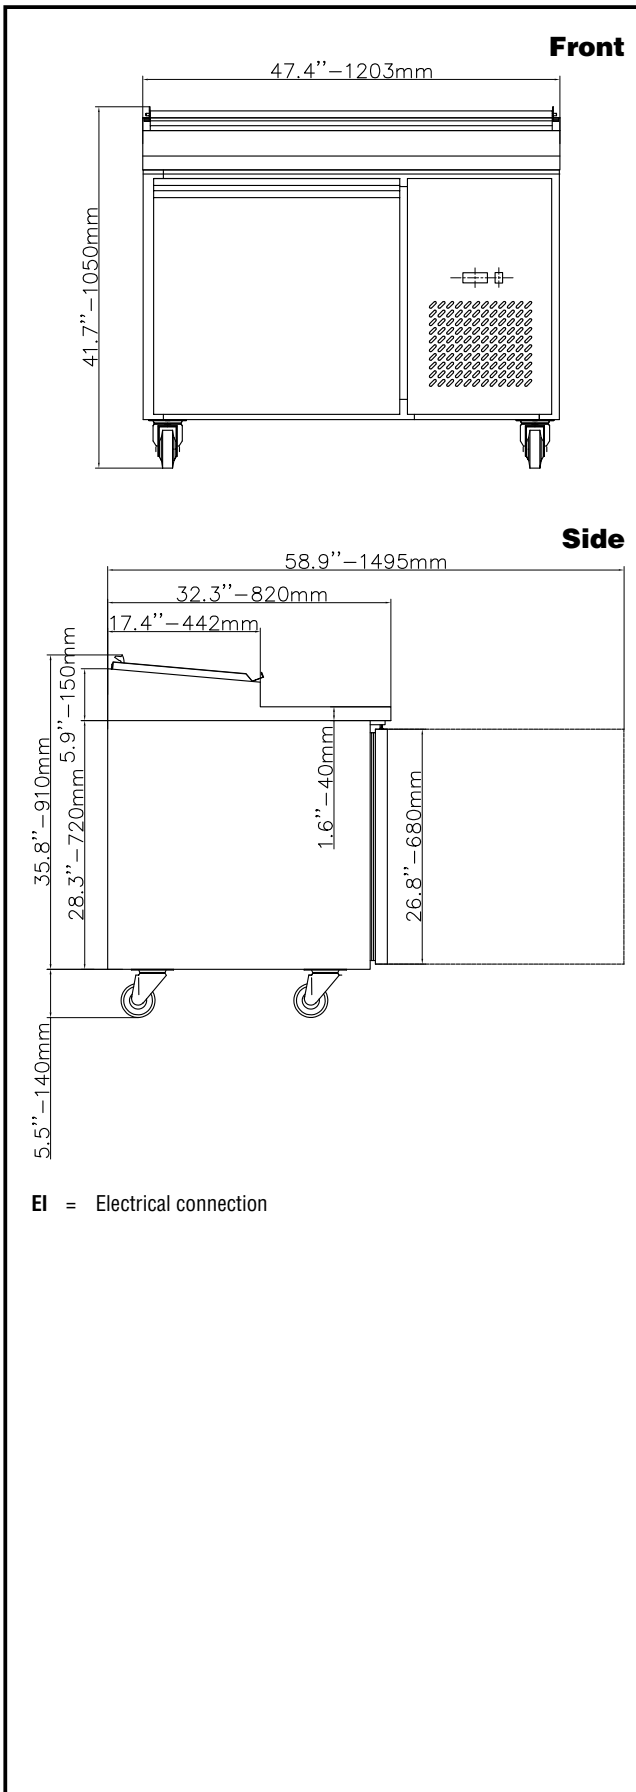

Electric

Supply voltage:

738252 (KCHPT50.6) 115 V/1 ph/60 Hz

Electrical power, max:

0.7 kW

Plug type:

NEMA 5-15

Capacity:

Gross capacity:

12 cu. feet

Key Information:

Door hinges:

Left

External dimensions, Width:

47 3/8" (1203 mm)

External dimensions, Depth:

32 1/4" (820 mm)

External dimensions, Height:

41 5/16" (1050 mm)

Number and type of doors:

1 Full

Internal Dimensions (depth):

22 13/16"

Internal Dimensions (height):

26 3/16"

Internal Dimensions (width):

27 3/8"

Shipping height:

44 1/2" (1130 mm)

Shipping weight:

291 lbs (132 kg)

Shipping volume:

43.24 ft³ (1.22 m³)

Type of grids (included):

Vinyl-Coated steel

Type of external material:

Stainless Steel

Type of internal material:

304 AISI

Warranty:

3 / 5 years

Refrigeration Data

Compressor power:

1/3 hp

Operating temperature min.:

ISO 9001 °F

Operating temperature max.:

41 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost

Sustainability

Current consumption:

7 Amps

Refrigerant type:

R290

Refrigerant weight:

105 g