



COMMERCIAL

# Refrigeration Equipment 2-Door Pizza Prep Table 71 " Long 9-1/3 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738253 (KCHPT72.9)

2-Door Pizza Prep Table 71  
" Long 9-1/3 Pan

## Short Form Specification

Item No. \_\_\_\_\_

2-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x70.79x19.53 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

## Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

## Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

## Optional Accessories

- shelf for 72" pizza counter PNC 880602
- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_

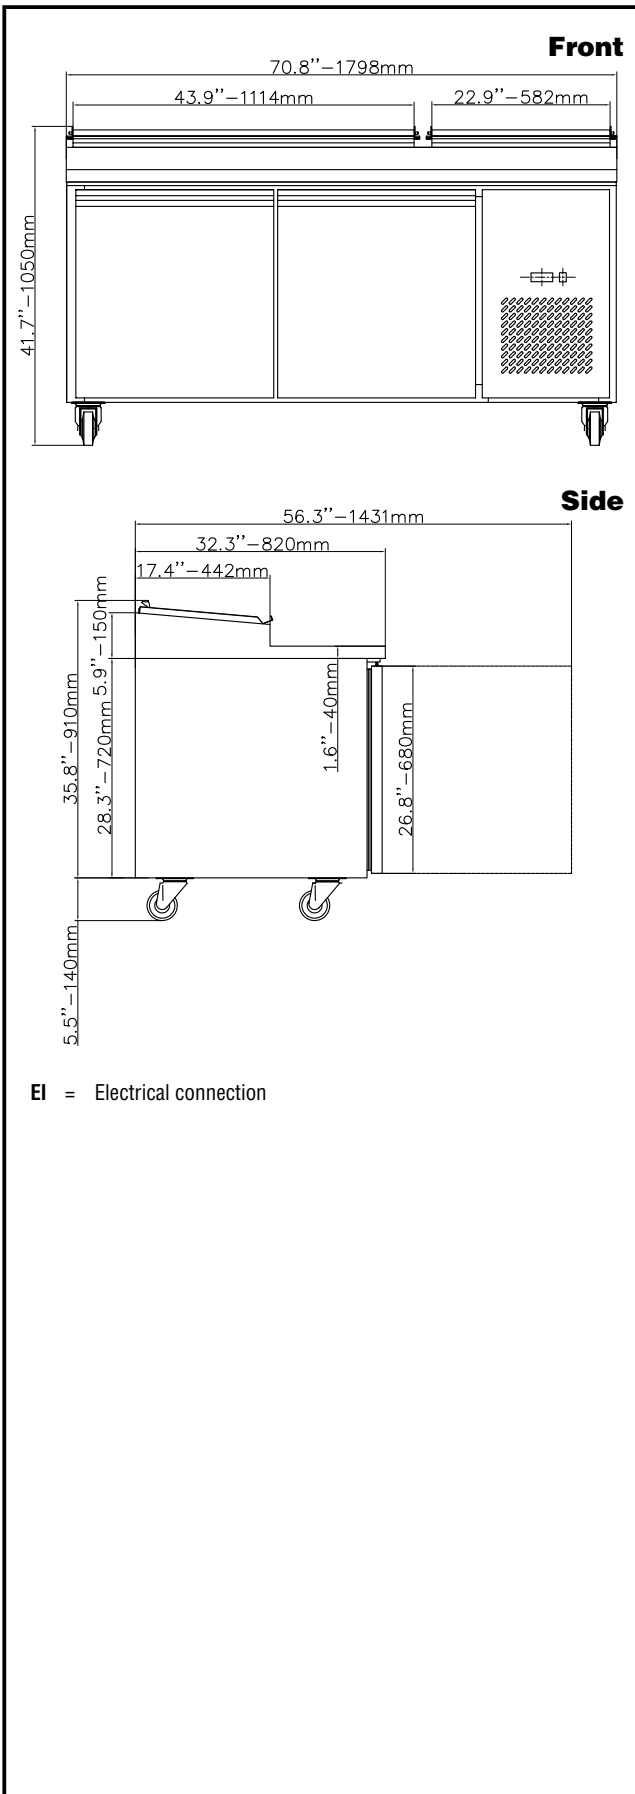

### Electric

<b>Supply voltage:</b>	738253 (KCHPT72.9)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		0.8 kW
<b>Plug type:</b>		NEMA 5-15

### Capacity:

<b>Gross capacity:</b>	22 cu.feet
------------------------	------------

### Key Information:

<b>Door hinges:</b>	1 Left+1 Right
<b>Capacity:</b>	22 cu.ft.
<b>External dimensions, Width:</b>	70 13/16" (1798 mm)
<b>External dimensions, Depth:</b>	32 1/4" (820 mm)
<b>External dimensions, Height:</b>	41 5/16" (1050 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	22 13/16"
<b>Internal Dimensions (height):</b>	26 3/16"
<b>Internal Dimensions (width):</b>	48 7/16"
<b>Net Weight:</b>	408 lbs
<b>Shipping height:</b>	44 1/2" (1130 mm)
<b>Shipping weight:</b>	397 lbs (180 kg)
<b>Shipping volume:</b>	63.65 ft <sup>3</sup> (1.8 m <sup>3</sup> )
<b>Type of grids (included):</b>	Vinyl-Coated steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	304 AISI
<b>Warranty:</b>	3 / 5 years

### Refrigeration Data

<b>Compressor power:</b>	1/3 hp
<b>Operating temperature min.:</b>	ISO 9001 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

### Sustainability

<b>Current consumption:</b>	7.5 Amps
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	105 g