



COMMERCIAL

Refrigeration Equipment Slide Top Bottle Cooler 65 " Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738268 (KCHBC65)

Slide Top Bottle Cooler 65
" Long

Short Form Specification

Item No. _____

Bottle cooler with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Locking lids.


Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

APPROVAL: _____

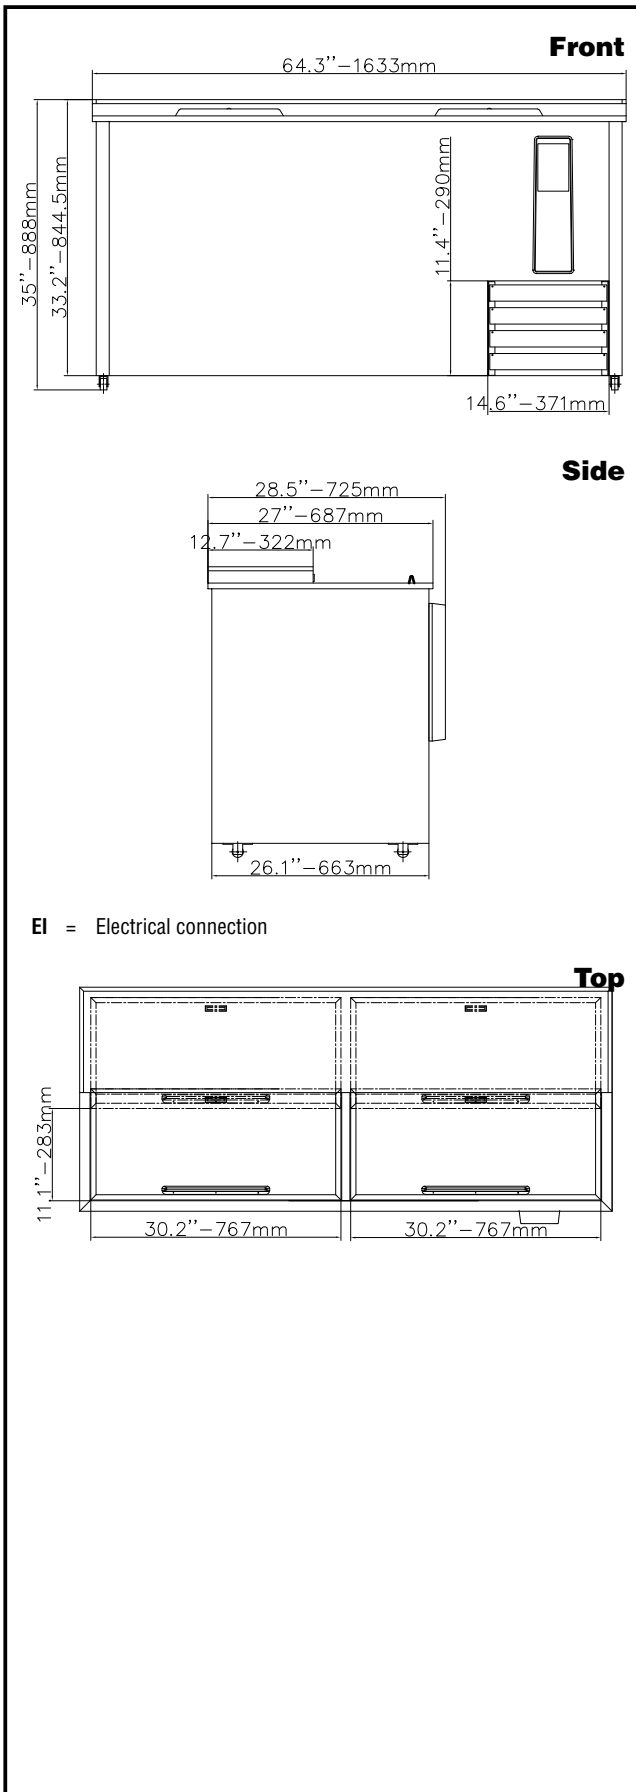

Electric

Supply voltage:

738268 (KCHBC65) 115 V/1 ph/60 Hz

Electrical power, max:

0.3 kW

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity: 19 cu. feet

Key Information:

External dimensions, Width: 64 5/16" (1633 mm)

External dimensions, Depth: 28 9/16" (725 mm)

External dimensions, Height: 34 15/16" (888 mm)

Internal Dimensions (depth): 26 1/16"

Internal Dimensions (height): 22 15/16"

Internal Dimensions (width): 60 3/8"

Shipping height: 39 3/4" (1010 mm)

Shipping weight: 276 lbs (125 kg)

Shipping volume: 44.34 ft³ (1.26 m³)

Type of external material: Black Prepainted Steel

Type of internal material: Stainless Steel

Warranty: 3 / 5 years

Refrigeration Data

Compressor Horsepower: 1/6

Operating temperature min.: ISO 9001 °F

Operating temperature max.: 41 °F

Condenser type: Fin & tube

Sustainability

Current consumption: 3 Amps

Refrigerant type: R600a

Refrigerant weight: 70 g