



COMMERCIAL

# Refrigeration Equipment 3-Solid Door Back Bar Refrigerator Black 73" Long


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

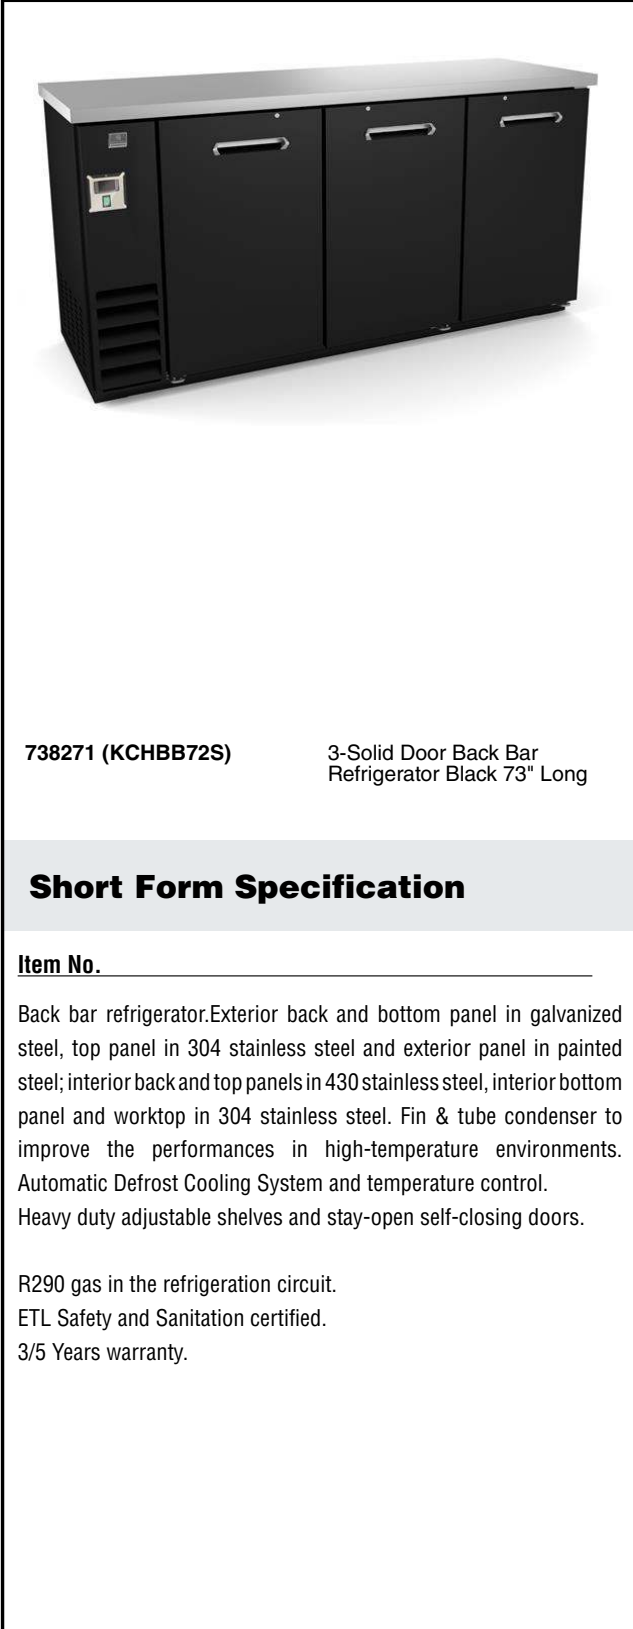

738271 (KCHBB72S)

3-Solid Door Back Bar  
Refrigerator Black 73" Long

## Short Form Specification

Item No. \_\_\_\_\_

Back bar refrigerator. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in the refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

## Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

## Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

## Optional Accessories

- 3 shelves for 72" back bar (one right and one left shelves) PNC 880610
- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_

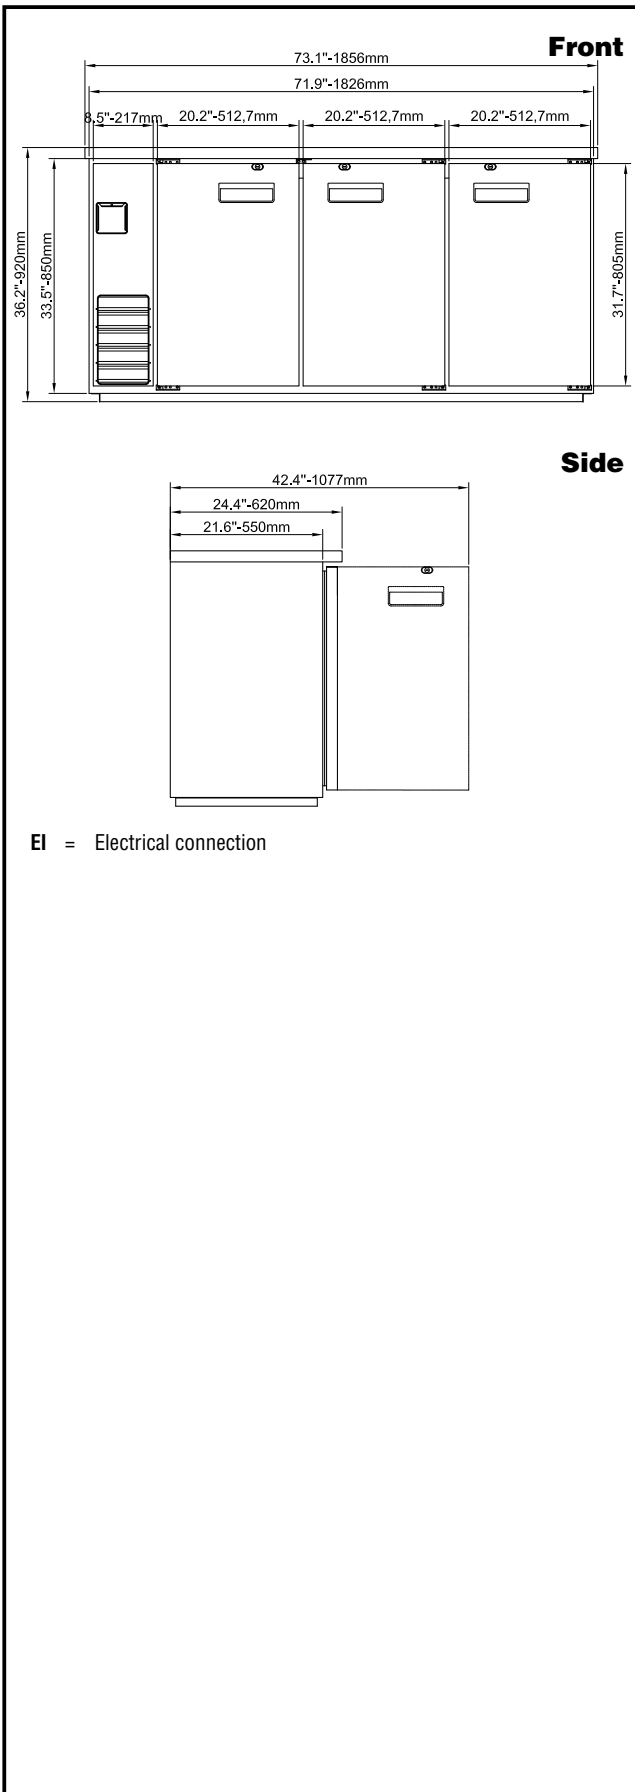

## Electric

Supply voltage:	115 V/1 ph/60 Hz
738271 (KCHBB72S)	
Electrical power, max:	0.3 kW
Plug type:	USA NEMA 5-15P

## Capacity:

Gross capacity:	20.8 cu.feet
-----------------	--------------

## Key Information:

Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	18 1/2"
Internal Dimensions (height):	28 15/16"
Internal Dimensions (width):	60 3/16"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	337 lbs (153 kg)
Shipping volume:	47.8 ft <sup>3</sup> (1.35 m <sup>3</sup> )
Number and type of grids (included):	6 - Vinyl-Coated Steel
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

## Refrigeration Data

Compressor Horsepower:	1/4
Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube

## Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
Refrigerant weight:	130 g