



COMMERCIAL

Refrigeration Equipment 2-Sliding Glass Door Full Height Merchandiser Refrigerator 41.25 " Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738318 (KCHSGM36R)

2-Sliding Glass Door Full
Height Merchandiser
Refrigerator 41.25" Long

Short Form Specification

Item No. _____

2-half glass door 27" long refrigerator. Epoxy coated black finish exterior & white Finish Interior, durable and easy to clean for daily commercial use. Control with cabinet temperature display. Self-closing door feature lock and key. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

Main Features

- External digital temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty Vinyl coated steel shelves.


Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty rails for sliding doors
- Epoxy coated black finish exterior & white finish interior and exterior, durable and easy to clean for daily commercial use

Sustainability

- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: _____

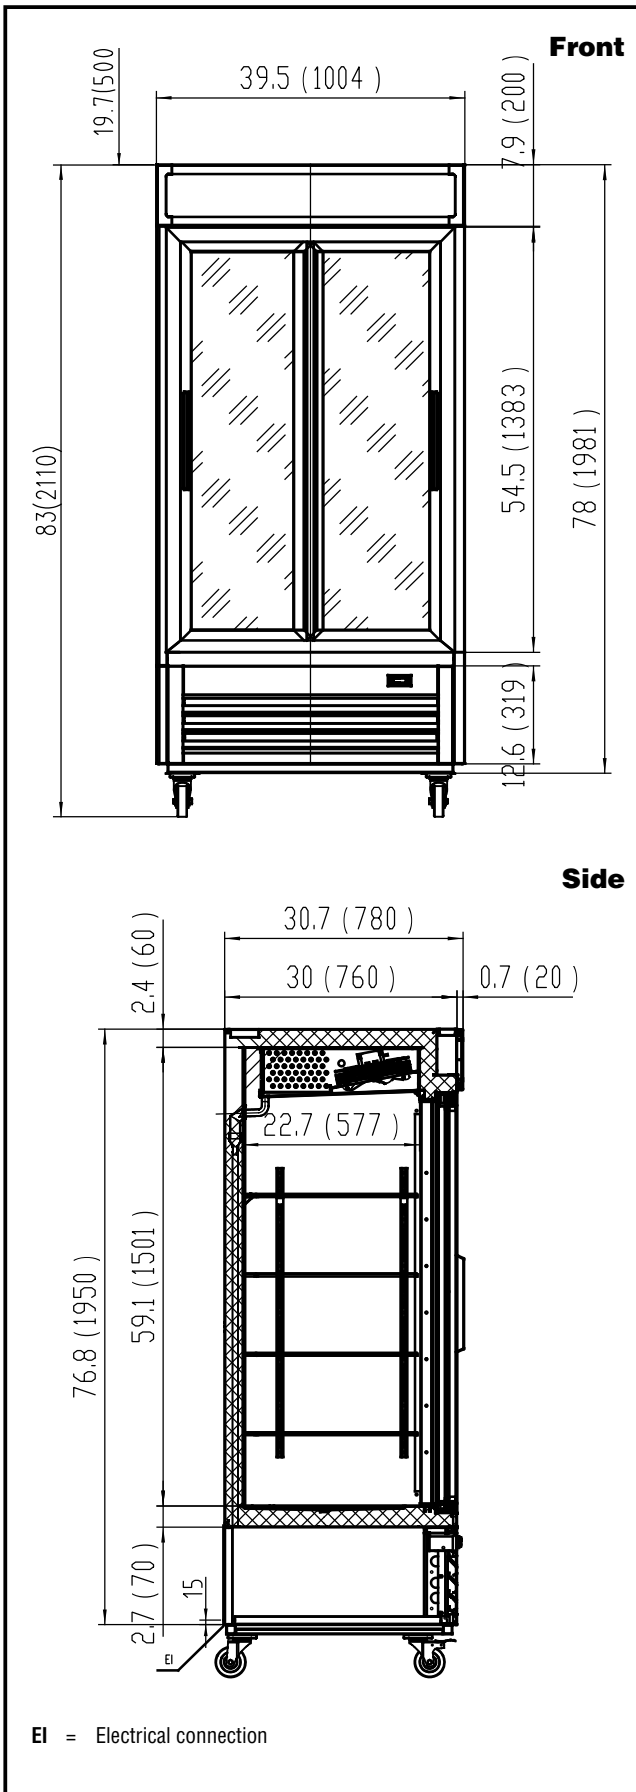

Electric

Supply voltage:	
738318 (KCHSGM36R)	115 V/1 ph/60 Hz
Electrical power, max:	0.5 kW
Defrost Power	
Plug type:	USA NEMA 5-15P
Maximum Over-Current Protection (MOP):	0A

Capacity:

Gross capacity:	29.9 cu.feet
------------------------	--------------

Key Information:

Capacity:	29.9469 cu.ft.
External dimensions, Width:	39 1/2" (1003 mm)
External dimensions, Depth:	30 11/16" (779 mm)
External dimensions, Height:	83 1/2" (2121 mm)
Internal Dimensions (depth):	25 3/16"
Internal Dimensions (height):	59 7/16"
Internal Dimensions (width):	34 13/16"
Shipping height:	82 1/4" (2090 mm)
Shipping weight:	454 lbs (206 kg)
Shipping volume:	62.47 ft ³ (1.77 m ³)

Refrigeration Data

Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	41 °F

Sustainability

Current consumption:	4.5 Amps
Refrigerant type:	R290