



COMMERCIAL

Refrigeration Equipment Slide Top Mug/Glass Froster 36" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738328 (KCHGF36)

Slide Top Mug/Glass Froster
36" Long

Short Form Specification

Item No. _____

36" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids. R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

Main Features

- ADA Height Compliant
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly


Construction

- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: _____

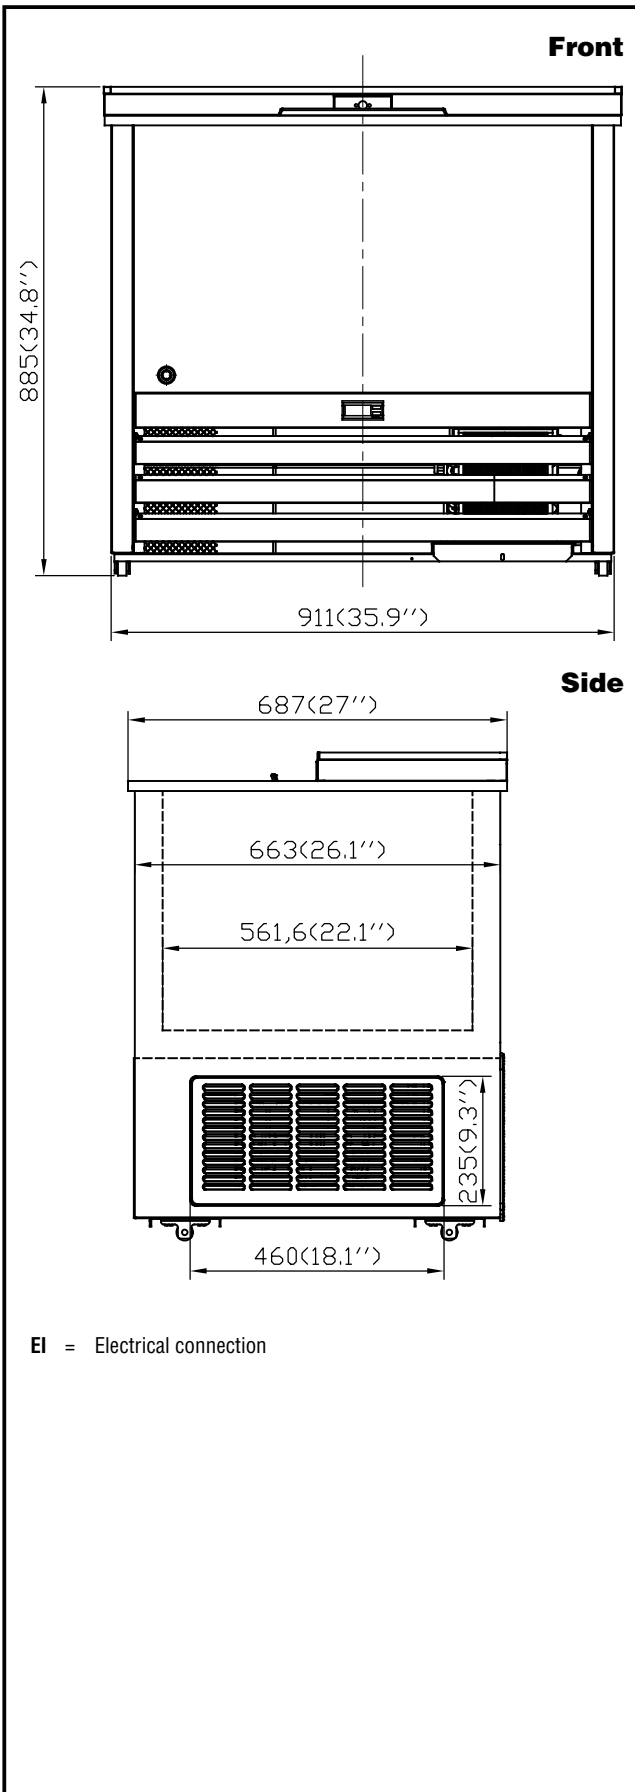

Electric

Supply voltage:	115 V/1 ph/60 Hz
738328 (KCHGF36)	
Electrical power, max:	0.2 kW
Defrost Power	
Plug type:	NEMA 5-15
Maximum Over-Current Protection (MOP):	0A

Key Information:

Capacity:	5.21599 cu.ft.
External dimensions, Width:	32 7/8" (835 mm)
External dimensions, Depth:	27 1/16" (687 mm)
External dimensions, Height:	34 13/16" (885 mm)
Internal Dimensions (depth):	14 3/4"
Internal Dimensions (height):	13 3/4"
Internal Dimensions (width):	29 11/16"
Shipping height:	39 3/8" (1000 mm)
Shipping weight:	187 lbs (85 kg)
Shipping volume:	25.35 ft ³ (0.72 m ³)
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:	-5.8 °F
Operating temperature max.:	-2.2 °F
Refrigerant type:	

Sustainability

Current consumption:	1.5 Amps
Refrigerant type:	R600a