



UNDERCOUNTER FREEZER

MODEL DUC29F Single Door





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material** Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1/3 Nema Config. NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ★ Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- T 6" casters with lock for easy mobility.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER DUC29F

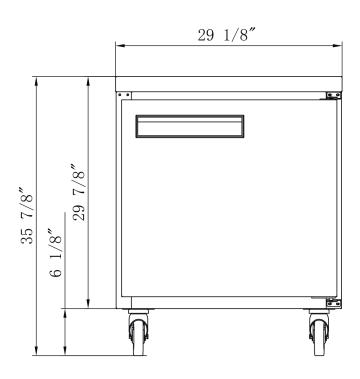

Front View

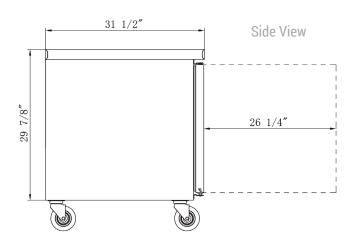

MODEL DUC29F

Rated Voltage 115V **Rated Frequency** 60Hz 550W **Total Input Power** 2.3A **Total Current Total Capacity** 6.99 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG C-Pentane Insulation Blowing Gas** R290/3.17oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)		_	40HQ CONTAINER CERT.
DUC29F	29 1/8 x 31 1/2 x 36	30 1/2 x 33 1/8 x 39 3/8	158 lbs	1	60

















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

