



COMMERCIAL

# Refrigeration Equipment 1-Door Mega Top Prep 29 " Long 9-1/6, 3-1/9 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738259 (KCHMT29.12)

1-Door Mega Top Prep 29  
" Long 9-1/6, 3-1/9 Pan

## Short Form Specification

### Item No.

1-door mega top refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 29x9x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41 °F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

## Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

## Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

## Optional Accessories

- shelf for 29 mega top and salad counter PNC 880600
- shelf clips PNC 880611
- drawers kit for 29" mega top PNC 880615


APPROVAL: \_\_\_\_\_

Part of



Electrolux  
Professional  
Group

**Kelvinator Commercial**  
www.kelvinatorcommercial.com

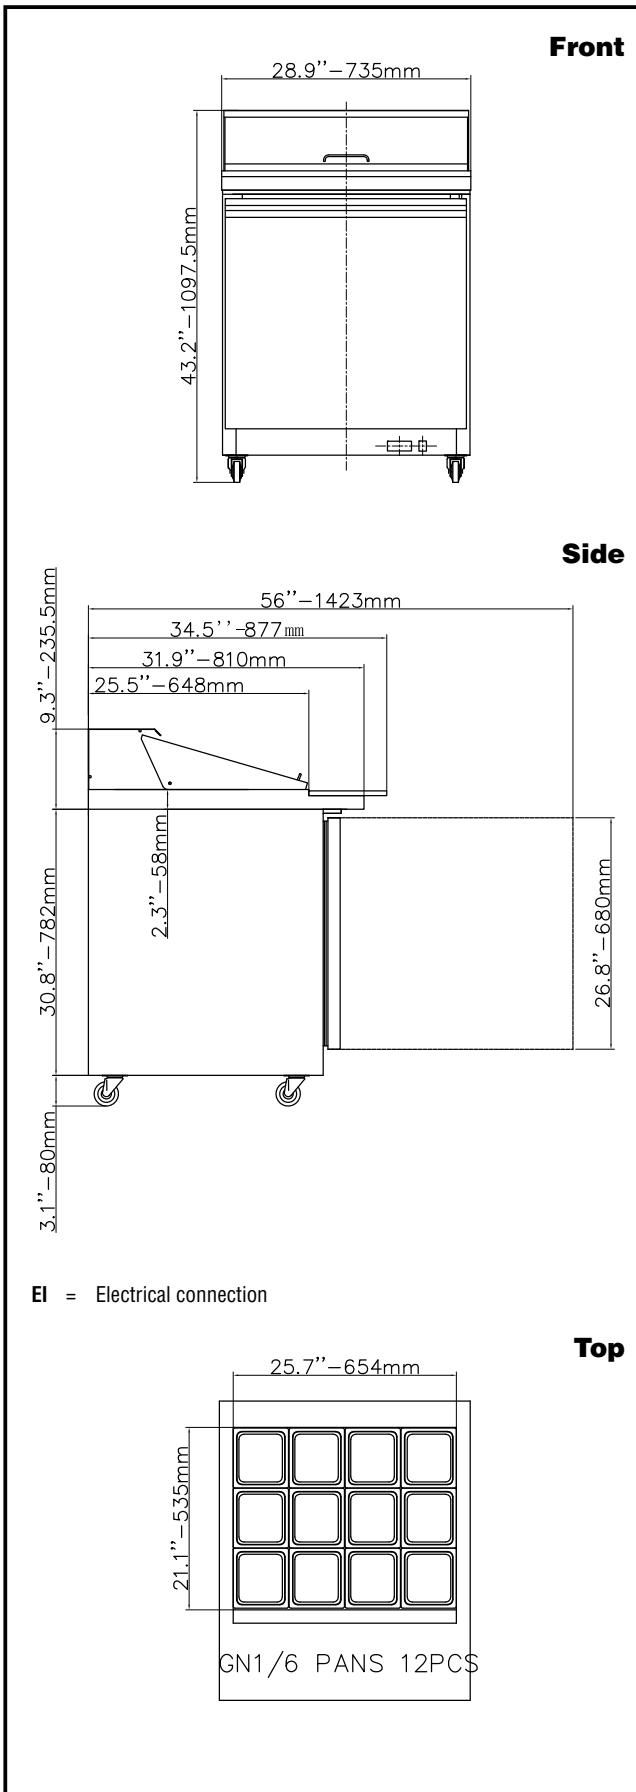

### Electric

**Supply voltage:**

738259 (KCHMT29.12) 115 V/1 ph/60 Hz

**Electrical power, max:**

0.5 kW

**Plug type:**

USA NEMA 5-15P

### Capacity:

**Gross capacity:** 7 cu.feet

### Key Information:

<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	28 15/16" (735 mm)
<b>External dimensions, Depth:</b>	34 1/2" (877 mm)
<b>External dimensions, Height:</b>	43 3/16" (1097.5 mm)
<b>Number and type of doors:</b>	1 Full
<b>Internal Dimensions (depth):</b>	23 13/16"
<b>Internal Dimensions (height):</b>	23 1/2"
<b>Internal Dimensions (width):</b>	24 1/16"
<b>Shipping height:</b>	47 1/4" (1200 mm)
<b>Shipping weight:</b>	229 lbs (104 kg)
<b>Shipping volume:</b>	29.88 ft <sup>3</sup> (0.85 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	1 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years

### Refrigeration Data

<b>Compressor power:</b>	
<b>Operating temperature min.:</b>	ISO 9001 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

### Sustainability

<b>Current consumption:</b>	5 Amps
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	85 g